




# AutoFish Injector Buttons

The AutoFish Injector is mainly set up and controlled using the tablet. The buttons on the side are useful for three purposes:

- (1) They provide a shortcut to put the injector into load without using the tablet.
- (2) They can be used to cycle the injector away from the line for troubleshooting problems.
- (3) They are necessary for programming the injector for either manual tagging or for use on the line.

The top button is the power switch, and the bottom button is an auxiliary tag switch (AUX). Both have lights that indicate the injector's status. The power switch lights up in a ring, as shown, while the AUX button will light up in the center.

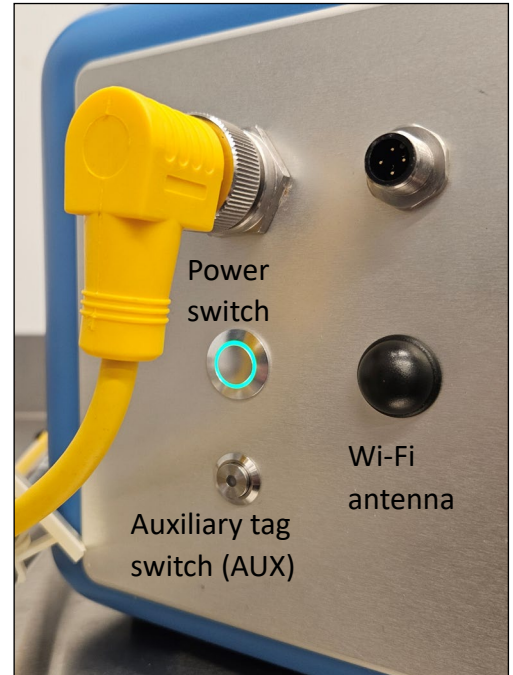

## 1 - Shortcut to Load Wire

Steps				
Hold AUX	Turn power on (or turn on the line power)	Continue to hold AUX for <b>3 seconds</b>	Steady on light indicates in LOAD	Press AUX to exit LOAD.

## 2 – Injector Troubleshooting

If you remove an Autofish Injector from the line to troubleshoot problems, the functions below allow you to cycle the injector without the tablet:

Steps		
TAG (operate the injector with wire)		
Press AUX		
Operate Injector without wire		
Hold AUX for <b>2 seconds</b> to force an injection without wire.	Press AUX to continue to cycle the injector without wire.	Turn power off to exit.
Note: If your injector begins to cycle continuously, you are in free run mode. Press AUX to exit.		

### 3 - Switching between a line and manual tagging

The AutoFish Injector communicates with the tablet over Wi-Fi if it is set up for manual tagging on the back table. It communicates with the tablet through the line if it is set up on a line. You must use the buttons to switch between manual tagging and using the injector on a line.

#### Set up for manual tagging




1. Find your network number on the tablet. E.g. For network is AutoFishNet12, the network number is 12.
2. Hold AUX.
3. Turn power on.
4. Immediately release AUX to enter programming mode.
5. Press AUX the number of times that equals your network number. A single long flash on the power switch indicates that the input was accepted.
6. Press AUX the number of times for the injector number, usually 1 or 2. A single long flash indicates that the input was accepted.
7. The power switch will flash the network number and then the machine number followed by a burst of 10 flashes to indicate that the injector has accepted your settings.

#### Set up for line use

1. Hold AUX.
2. Turn power on.
3. Immediately release AUX to enter programming mode.
4. Press AUX once. A single long flash on the power switch indicates that the input was accepted.
5. Press AUX 10 times.

### Connection Status

During operation, the power switch indicates the injector's connection status:

If you see...	Then it means...
 one quick flash	the injector is set up and ready for use on a line.
 two quick flashes	the injector is set up and ready for manual tagging.
 three quick flashes	the injector was set up for manual tagging but is <b>NOT</b> connected to the router. Reprogram and troubleshoot connection as needed.



Need help? If you have questions about using your AutoFish Injector, call us at +1 (360) 764-8850 or email [office@nmt.us](mailto:office@nmt.us).